



Description MINIATURE CIRCUIT BREAKER

Code MT 60

No. of poles 2P

No. modules 2


Rated current 63 A

Curve C

Rated voltage 230-400 V

|   |   |   |   |
|---|---|---|---|
| Standard                                | EN 60898, EN 60947-2                          | Rated frequency (Hz)                    | 50/60 Hz                                      |
| Breaking capacity EN 60898 230V (Icn)   | 6000 A  | Breaking capacity EN 60898 400V (Icn)   | 6000 A  |
| Breaking capacity EN 60898 (Ics)        | 1 x Icn                                       | Breaking capacity EN 60947-2 230V (Icu) | 20 kA   |
| Breaking capacity EN 60947-2 400V (Icu) | 10 kA   | Breaking capacity EN 60947-2 (Ics)      | 75% Icu                                       |
| Insulation voltage                      | 500 V   | Rated impulse withstand voltage         | 4 kV  |
| Minimum operating voltage               | 12V ac/dc                                     | Maximum operating voltage               | 440V AC / 220V DC                             |
| Electrical endurance                    | 10000   | Mechanical endurance                    | 20.000  |
| Section rigid cable                     | <=1x35 - <=2x16 - <=1x16+2x10 mm <sup>2</sup> | Section flexible cable                  | <=1x35 - <=2x16 - <=1x16+2x10 mm <sup>2</sup> |
| Rated tightening torque                 | 2 Nm  | Operating temperature                   | -25 +60 °C                                    |
| Stocking temperature                    | -40 +70 °C                                    | Electrocod                              | 1411  |

### DIMENSIONAL

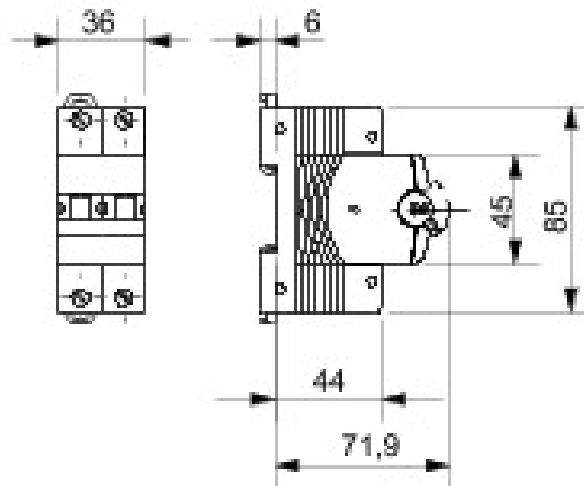

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 12/04/2021

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice