


IP degree	IP66	Mechanical resistance	> IK10
Houseable interloc. socket	1	Houseable IB socket-outlets	16/32 A SELV
Glow Wire Test	850 °C	Suitable for	Heavy duty
Electrocod	2222	Impact resistance at -20 °C	20 J

### DIMENSIONAL

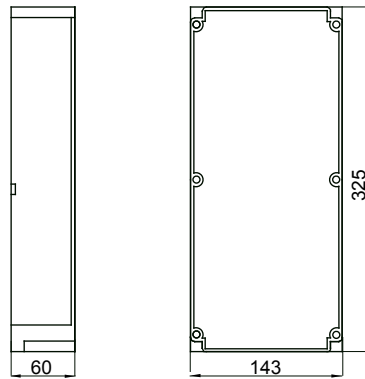

### TECHNICAL SYMBOLOGY

**IP**

IP66

**GWT**

850 °C

> IK10

### STANDARDS/APPROVALS

