
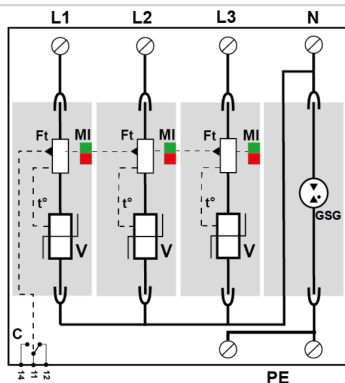


- Discover our latest innovation : the [DAC50S-31-275](#)
- Type 2 AC Multipolar surge protector
- In: 20 kA
- I<sub>max</sub> total: 40 kA
- Pluggable module for each phase
- Remote signaling
- EN 61643-11, IEC 61643-11, UL1449 ed.5 compliance



V: High-energy varistor  
GSG: Specific gas tube  
Ft: Thermal fuse  
C: Remote signaling contact  
t<sup>°</sup>: Thermal disconnection system  
MI: Disconnection indicator

#### Electrical Characteristics

SPD type	IEC	2
Network		230/400 V 3-phase+N
AC system		TT-TNS
Nominal line voltage	Un	230 Vac
Max. AC operating voltage	Uc	255 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT	335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT	440 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT	1200 V/300A/200 ms withstand
Residual Current	I <sub>pe</sub>	None
Leakage current to Ground	If	None
Follow current		None
Nominal discharge current 15 x 8/20 µs impulses	I <sub>n</sub>	20 kA
Max. discharge current max. withstand @ 8/20 µs by pole	I <sub>max</sub>	40 kA
Total Maximum discharge current max. total withstand @ 8/20 µs	I <sub>max</sub> Total	40 kA
Connection mode(s)		L/N and N/PE
Protection mode(s)		Common/Differential mode
Residual voltage at 5 kA @ 5 kA (8/20µs)	Up-5kA	0.9 kV
Protection level L/N @ I <sub>n</sub> (8/20µs)	Up L/N	1.25 kV
Protection level N/PE @ I <sub>n</sub> (8/20µs)	Up N/PE	1.5 kV
Admissible short-circuit current	I <sub>sc</sub>	25 000 A

#### Mechanical Characteristics

Technology		MOV+GDT
SPD configuration		3-phase+Neutral
Connection to Network		By screw terminals: 2.5-25mm <sup>2</sup> / by bus
Format		Plug-in modular box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Disconnection indicator		1 mechanical indicator by pole
Spare module(s)		DSM40-230+DSM40G-600
Remote signaling of disconnection		Output on changeover contact
Dimensions		See diagram
Weight		0.331 kg

#### Disconnectors

Thermal disconnector		Internal
Installation ground fault breaker		Type 'S' or delayed
Back-up protection device		Fuses type gG - 50 A

#### Standards

Standards compliance		IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification		CSA / UL Listed

#### Part number

461532