




Range 44 CE - Surface-mounting watertight junction boxes in compliance with EN 60670-1 (CEI 23-48) and IEC 60670-22 (CEI 23-94) and made in high-performance technopolymers. The range includes versions with protection degree IP44, IP55, IP56 with smooth walls or with quick entry cable glands and different type of covers: blind / transparent, deep/plain, press-on/screw (in plastic, also 1/4 turn, or in metal). Available in different self-extinguishing materials (up to GWT 960 °C). Suitable for ordinary junctions, for special uses, and for industrial uses.

|                           |                                            |                                      |                           |
|---------------------------|--------------------------------------------|--------------------------------------|---------------------------|
| Insulation class          | II (according to IEC 61140 standards)      | Colour                               | Grey RAL 7035             |
| IP degree                 | IP56                                       | Material                             | Technopolymer GWPLAST 120 |
| Mechanical resistance     | IK08                                       | Internal dim. LxHxD (mm)             | 120x80x50                 |
| Max Ø holes possible      | 29 mm                                      | Lid screws (no. and type)            | 4 - Stainless steel       |
| Application               | Industrial uses                            | Glow Wire Test                       | 650 °C                    |
| Lid                       | Plain screwed                              | Operating temperature                | -25 +60 °C                |
| Type of material          | Halogen-free in compliance with EN 60754-2 | Electrocod                           | 02211                     |
| Thermo-pressure with ball | 110 °C                                     | Torque screws tightening             | 1 NM                      |
| Walls                     | Smooth                                     | Accessories for insulation restoring | GW44622                   |

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids         |                    | Bases         |                    | Solvents           |               |               |                    | Mineral oil        | UV rays            |
|-----------------|---------------|--------------------|---------------|--------------------|--------------------|---------------|---------------|--------------------|--------------------|--------------------|
|                 | Concentrated  | Diluted            | Concentrated  | Diluted            | Hexane             | Benzol        | Acetone       | Alcohol            |                    |                    |
| Resistant       | Not resistant | Limited resistance | Not resistant | Limited resistance | Limited resistance | Not resistant | Not resistant | Limited resistance | Limited resistance | Limited resistance |

#### DIMENSIONAL

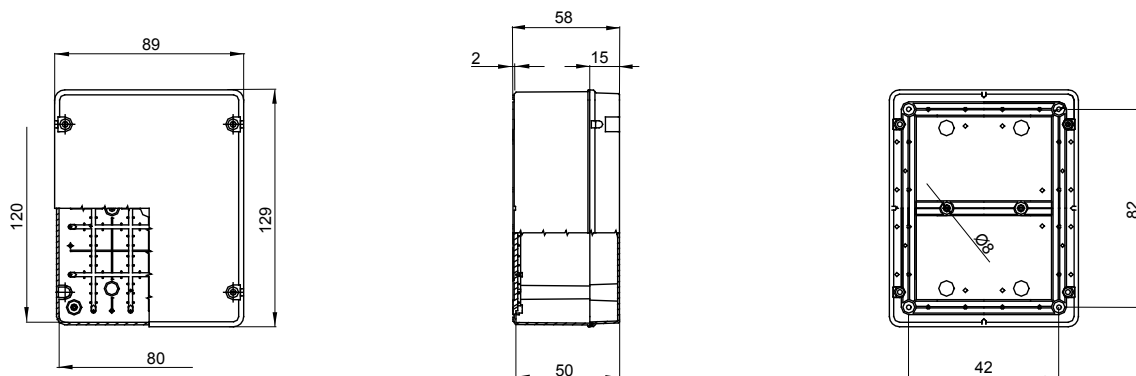

#### TECHNICAL SYMBOLOGY

|                                                                                                                              |                   |                   |                      |                                                 |                                                                         |                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------|----------------------|-------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| <br>II (according to IEC 61140 standards) | <b>IP</b><br>IP56 | <b>IK</b><br>IK08 | <b>GWT</b><br>650 °C | <b>INSTALLATION</b><br>-25 °C min<br>+60 °C max | <b>HF</b><br>HALOGEN FREE<br>Halogen-free in compliance with EN 60754-2 | <br>110 °C |
|------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------|----------------------|-------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|

#### STANDARDS/APPROVALS

