


PBpro PCI

Universal PCI Boards for Use as Master or Slave

- Single and dual channel interface boards in universal PCI format for integrating PCs into PROFIBUS architectures as machine controllers, supervisory control applications, field devices or operator panels.

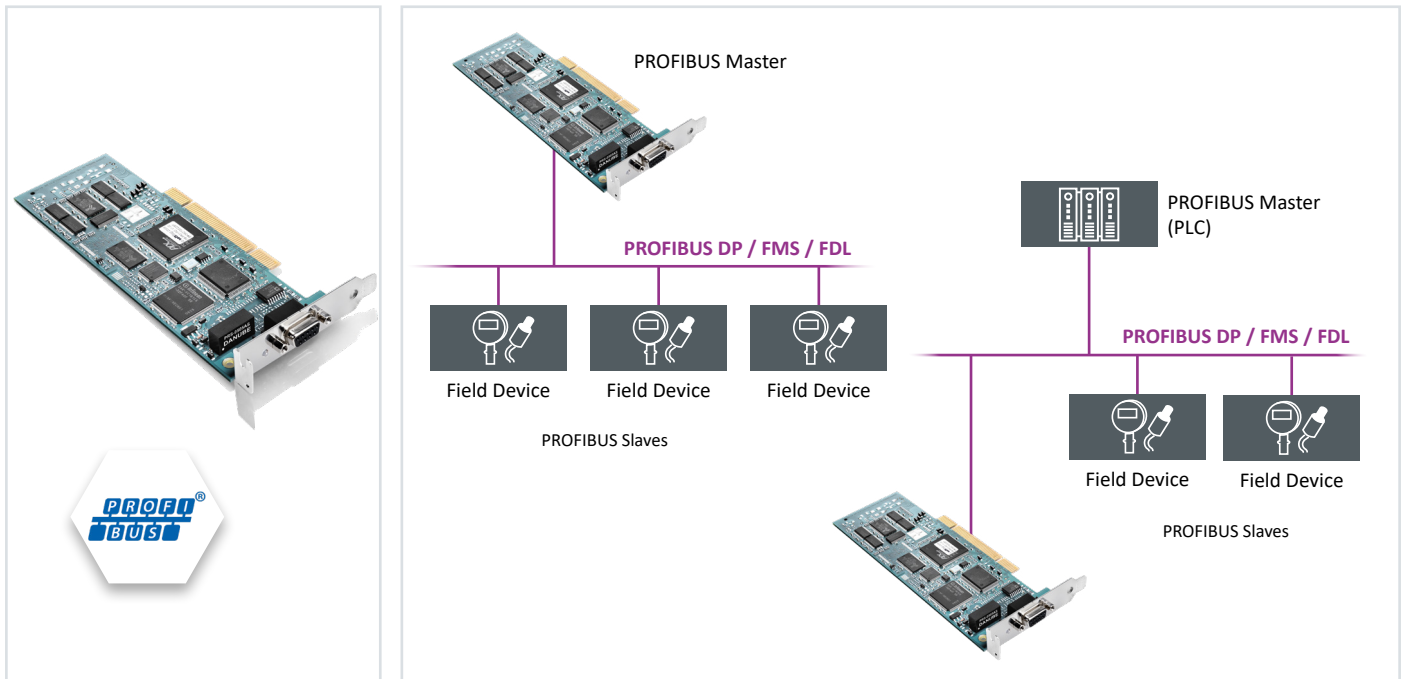

Always the Fitting PROFIBUS Protocol

- PROFIBUS Master and Slave functionality
- Support of PROFIBUS DP, PROFIBUS FMS and PROFIBUS FDL protocols
- Universal interface solution for integration in industrial and embedded PCs

Rapid Integration




- Direct access to all protocols via PROFIBUS API
- Sample programs including comments
- Integration in various plant asset management tools

Large Choice of Drivers

- Use in Windows and Linux operating systems
- PROFIBUS CommDTM for FDT applications included in scope of delivery

PBpro PCI

Technical Data

	Master/Slave, Single Channel ¹	Slave, Single Channel ¹	Master/Slave, Dual Channel
PROFIBUS Protocol			
DP-V0 Master	•		•
DP-V1 Master: Acyclic C2 Services	•		•
DP-V2 Master ²	•		•
FMS	•		•
FDL	•		•
DP-V0 Slave	•	•	•
Fieldbus Connection	9-Pin D-Sub female, EIA-485, galvanically isolated		
Transfer Rates	9.6; 19.2; 45.45; 93.75; 187.5; 500; 1,500; 3,000; 6,000; 12,000 Kbit/s		
PC Interface	PCI V2.2, 128 KB Shared RAM Per Channel		
Operating Temperature	0 °C ... +70 °C		
Storage Temperature	-20 °C ... +70 °C		
Relative Humidity	< 90 %, non-condensing		
Dimensions	168 mm x 64 mm	168 mm x 64 mm	168 mm x 107 mm
Power Supply			
Supply Voltage	5 VDC / 3.3 VDC (±5 %)		
Current Consumption	Typically 500 mA / 200 mA	Typically 500 mA / 200 mA	Typically 700 mA / 300 mA
Drivers Available for	Windows XP, Windows 7, Windows 8, Windows 10, Linux		
Conformity	  		

¹ Also Available with Low Profile Slot Bracket

² DP-V2 available for custom integration.

Please contact Softing to discuss your specific requirements.

Scope of Delivery

Hardware	PC interface board
Software	Download from the Softing website : Drivers, sample programs
Documentation	Download from the Softing website

Order Numbers

PB-PRO1-PCI	Master/Slave, Single Channel
PB-PRO1-PCI/LP	Master/Slave, Single Channel, Low Profile
PB-PRO1S-PCI	Slave, Single Channel
PB-PRO1S-PCI/LP	Slave, Single Channel, Low Profile
PB-PRO2-PCI	Master/Slave, Dual Channel

Your local Softing contact:

<http://industrial.softing.com>

optimize!
softing